

Specifications

Model	14/115	10/125	7/170
Compressor			
Free Air Delivery - m ³ /min (cfm)	11.3 (400)	12.7 (450)	17.0 (600)
Rated Operating Pressure - bar (psi)	14.0 (200)	10.3 (150)	7.0 (100)
Maximum allowable pressure - bar (psi)	15.5 (225)	12.1 (175)	8.6 (125)
Safety valve setting - bar (psi)	17.2 (250)	13.8 (200)	12.0 (175)

Engine			
Make	Ingersoll Rand	Ingersoll Rand	Ingersoll Rand
Model	6IRF8AE	6IRF8AE	6IRF8AE
No. of cylinders	6	6	6
Full load speed - rpm	2200	2200	2200
Power - kW (hp)	129 (173)	129 (173)	129 (173)
Electrical - volts	24	24	24
Cooling	Water	Water	Water
Fuel tank capacity - litres	276	276	276
Air outlets BSPT (British Standard Pipe Thread)	1 x 2", 1 x 11/4" & 2 x 3/4"	1 x 2", 1 x 11/4" & 2 x 3/4"	1 x 2", 1 x 11/4" & 2 x 3/4"


Sound level data			
Fully compliant to outdoor noise directive 2000/14/EC (2006) LWa	99	99	99

Tyre Size			
Tyre size	205/75 R17.5	205/75 R17.5	205/75 R17.5 *
Number of wheels	2	2	2

Dimensions (With running gear)			
Length (fixed height) - mm (A)	4852		
Length min-max (adjustable height) - mm (A)	4793 ~ 4998		
Width - mm (B)	1985		
Height - mm (C)	1890		
Ground clearance - mm (D)	250		
Weight (net) fixed/adjustable - kg	2570 / 2650		
Weight (working) fixed/adjustable - kg	2770 / 2850		

Dimensions (On shipping skid)	
Length - mm	3122
Width - mm	1550
Height - mm	2055
Weight (net) - kg	2420
Weight (working) - kg	2745

* 225/75 R16 for France

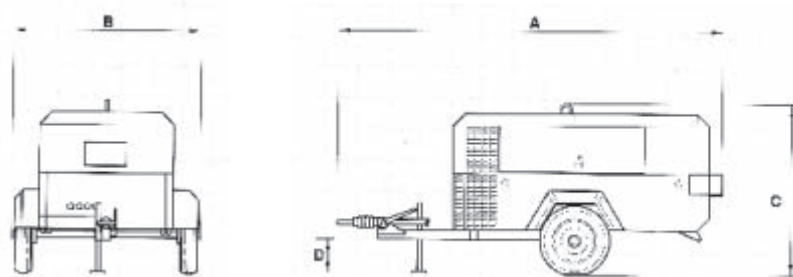

Drève Richelle 167
B-1410 Waterloo, Belgium
www.doosanportablepower.com

